



## Mounting instructions of control desk for the Vbar Control

### Our recommendation:

When fixing the base plate to the control take care when tightening the screws. They should only get fixed moderately. Watch out not to rip out the thread of the control!


1. Fix the base plate to the stands by the M4x12 screws. The pre-assembled sleeves should each point to the outside and the bores with the M4threads to the front (Ill. 1).
2. Remove the screws at the back of the control (Ill. 2). Place the supplied aluminium distance sleeves into the top screw holes of the control (Ill. 3). Now fix the base plate to the Vbar control, using the supplied M3x50 screws (Ill. 4).
3. Take the CFK distance holder and apply (glue) to it the supplied foam rubber pads as shown in Ill. 5. Now turn the distance holder and fix it with the M4x8 screws in such a way that the pads press against the control (Ill. 6).

The remaining screws should only be tightened slightly for the moment, they will get properly fixed when the hand supports and the control have been adjusted to each other.


4. Screw the CFK hand supports slightly to the aluminium holder with the M3x8 screws (Ill.7).
5. Now hook in the hand supports (aluminium holders) into the aluminium sleeves.
6. The distance between the CFK hand supports and the distance support allows adjustment of the hand supports. The smaller the distance, the lower the looseness (Ill. 8 and 9).
7. When all screws are fixed and the hand supports can get hooked in without problem, then assemble the holders.
8. Mount the holders in such a way that the CFK bearing plates point to each other. Screw the holders only to such an extent that you still can move them easily. Now screw together the carry handle with the bearing plates by using the supplied screws M4x10 (Ill.10 and 11). Then you can fix the holders tightly to the control.

For more illustrations please check our homepage referring to Vbar Control. [www.mb-modelltechnik.com](http://www.mb-modelltechnik.com)


We hope you will enjoy the control with the auxiliaries from mb-modelltechnik!

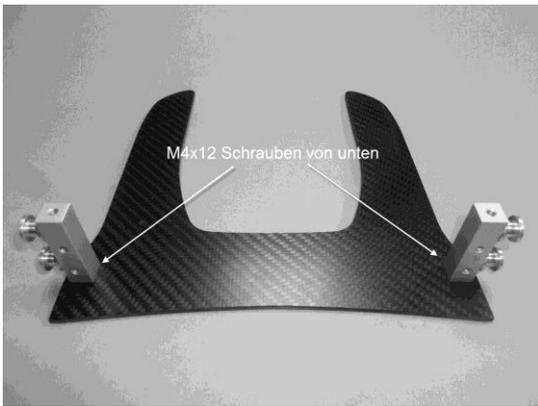

III. 1 M4x12 screws from below

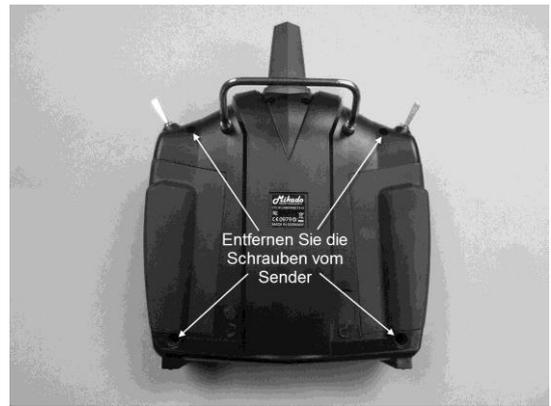

III. 2 Remove the screws from the control

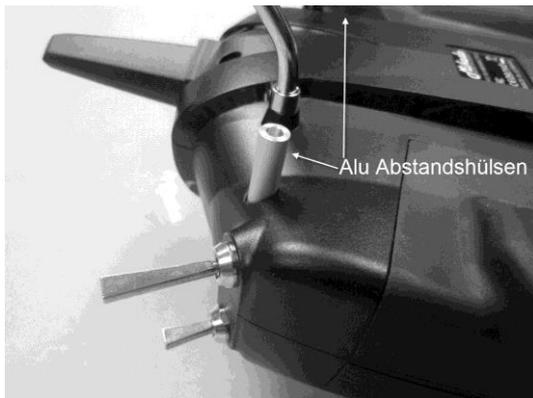

III. 3 aluminium distance sleeves




III. 4 screws




III. 5 Pads should be applied (glued) in this area




III. 6 screws

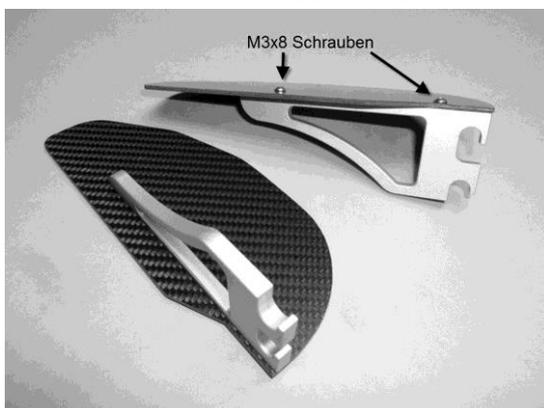


III. 7 screws

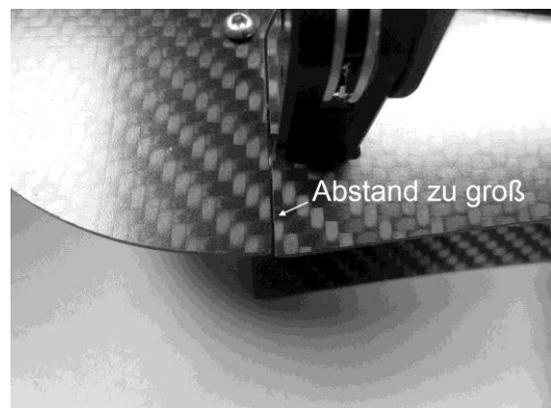

III. 8 distance too large

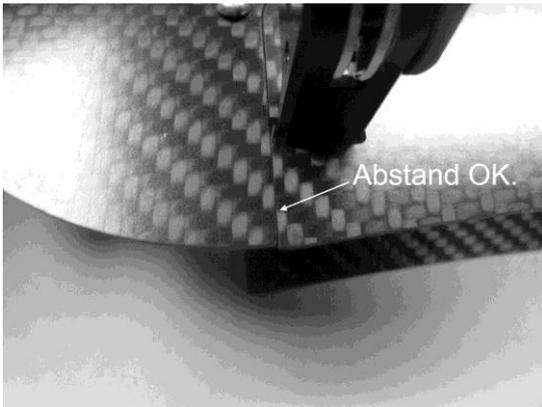

III. 9 distance ok

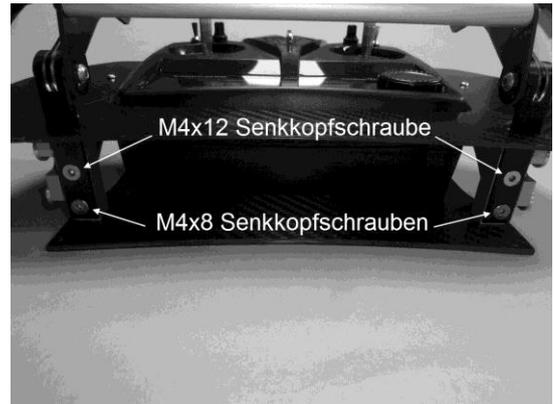

III. 10 M4x12 countersunk screw  
M4x8 countersunk screw



III. 11 screw